




## DRIVER EM-282C

Série EM-282C



EM-282D

- 12-48 V DC
- Limit proudu (1–200 A)
- Ramping
- Digitální nastavení parametrů
- Regulace rychlosti

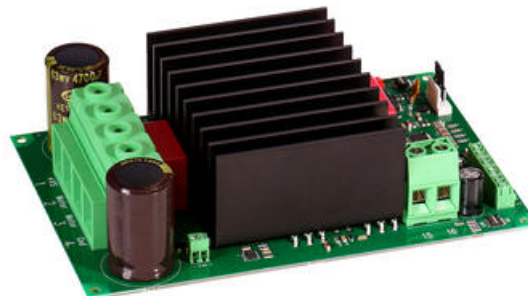

### POPIS PRODUKTU

### SPECIFIKACE

<b>Brake output</b>	Ano
<b>CanOpen</b>	Ne
<b>Change direction of rotation (CW/CCW)</b>	Ano
<b>Continuous current max.</b>	2x100A
<b>Current limit</b>	1-200 A
<b>Current limit adjustable</b>	Ano
<b>Current setting range</b>	1-200 A
<b>Currenttrip autoreveice</b>	Ano
<b>Ethercat</b>	Ne
<b>Forward/Reverse</b>	Ano
<b>Hmotnost</b>	750 g
<b>Impulse/continuous mode</b>	Ano
<b>Joystick analog input</b>	Ne
<b>Montáž</b>	DIN lišta
<b>Napájecí napětí</b>	12 V DC, 24 V DC, 36 V DC
<b>Parallel driver four motors</b>	Ne
<b>Parallel driver two motors</b>	Ne
<b>Position with potentiometer</b>	Ne

<b>Positioning</b>	Ne
<b>Potentiometer adjustable speed</b>	Ano
<b>Provozní teplota</b>	-40°C...+60°C
<b>PWM frequency</b>	2kHz/16kHz
<b>RS232</b>	Ne
<b>RS485/Modbus</b>	Ano
<b>Softstart/stop</b>	Ano
<b>Speed settings</b>	Ano
<b>Speedregulator</b>	Ano
<b>Špičkový proud</b>	200 A
<b>Stop at limit position</b>	Ano
<b>Suitable engine</b>	DC
<b>Supplier</b>	Electromen

