



KOMBINOVANÁ SIRÉNA S BLIKAČEM, Ø93 MM

Série CS1

C111221005

CS1 siréna/záblesk LED oranžová 24V

- Rychlá instalace díky systému bajonetových zámků
- Výběr z 32 tónů
- Akustická intenzita 86 – 106 dB
- Krytí IP 65




POPIS PRODUKTU

Sirény pro vnitřní i venkovní použití (IP 65), druh tónu je volitelný DIP-přepínači uvnitř. Oba typy lze objednat v bílé a červené barvě.

SPECIFIKACE




Barva	Oranžová
Barva těla	Bílá
Druh montáže	Horizontální, Vertikální
Frekvence blikání	1 Hz
Frekvence max.	2900 Hz
Frekvence min.	440 Hz
Hladina zvuku max.	109 dB
Hladina zvuku min.	88 dB
Hmotnost	258 g
Jmenovitý proud max.	0,041 A
Jmenovitý proud min.	0,014 A
Napájecí napětí	24 V
Napájecí napětí AC/DC max.	35 V
Napájecí napětí AC/DC min.	18 V
Ovládání zvuku	Ano

Počet tónů	32 ks
Provozní teplota max.	70 °C
Provozní teplota min.	-20 °C
Třída krytí	IP65
Typ zdroje	Oranžová LED
Zdroj světla	LED

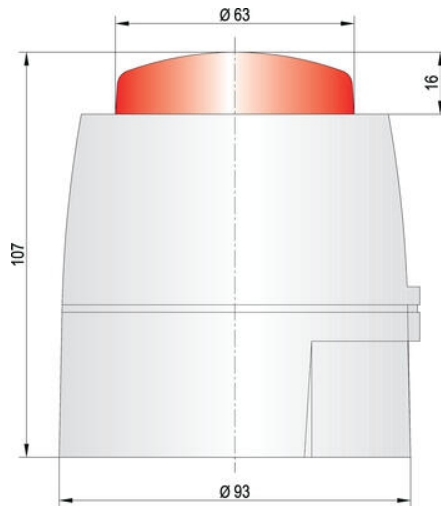

Tontabelle / Tone table

No.	Sound	Tone frequency	DP-switch	2nd stage alarm (Hz)
1	LF Sweep	800 Hz on/0.5 sec	11111	800 cont
2	Alarm tone BS standard	800 Hz on/2s	11110	800 cont
3	Alarm tone BS standard	800 Hz on/0.5 sec	11101	800 cont
4	Alarm tone BS standard	800 Hz on/2s	11100	800 cont
5	LF Back up alarm tone	800 Hz on/1 sec on/off	11101	800 cont
6	LF Back up alarm	800 Hz on/1.5 sec on/off	11101	800 cont
7	LF Back up alarm tone - Int	800 Hz on/1.5 sec on/off	11100	800 cont
8	LF Chirp tone BS/600	800 Hz cont	11000	800 tone
9	Swedish 11th	800 Hz on/1.5s	10111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.225ms on/0.225ms off	10110	3.75 sec on / 0.25 sec off / 800-900
11	Dutch sweep tone	970Hz cont	10101	800 cont
12	Swedish sweep tone	800 Hz on/2s	10100	800 cont
13	Swedish tone 25Hz	800 Hz on/2s	10001	800 cont
14	Alarm LF slow sweep	800 Hz on/2s	10010	800 cont
15	Swedish tone	800 Hz on/2s	10000	800 cont
16	US Temporal Pattern LF	250Hz for 0.5 sec on 0.5 sec off/3	10000	800 cont
17	Intermittent tone BS standard	Intermittent tone 800Hz on/0.5 sec on/off	01111	800 cont
18	SD 8201 LF BS/600 2s 1 8P	Intermittent 970Hz 0.225ms on/0.225ms off	01110	800 tone
19	Intermittent tone BS	800 Hz on/0.5 sec on/off	01101	800 cont
20	SCRS LF	Intermittent 200Hz 100ms on/400ms off	01100	800 tone
21	Chirp tone	800 Hz on/off	01101	800 tone
22	LF Chirp	800 Hz on/off	01101	800 cont
23	LF Chirp tone	800 Hz	01001	800 cont
24	Swedish tone 25Hz	800 Hz on/2s	01000	800 tone
25	German 120 tone	Swedish 120-300 Hz on/1s	00111	800 cont
26	Swedish tone 25Hz	Intermittent 60Hz 150 ms on / 150 ms off	00110	800 tone
27	French tone 4190	Stable for 80 ms and 140Hz burst/50ms	00110	800 cont
28	Swedish LF alarm	Swedish 800Hz	00100	800 tone
29	US Temporal Pattern HF	800 Hz on/0.5 sec on/0.5 sec off for 1.5 sec then repeat	00011	800 cont
30	Swedish tone ramp 1/short	800 Hz on/1.5 sec then 25 Hz	00010	800 cont
31	EP BS/3.1 - 1/short	Intermittent tone 800/970 Hz on/2s	00000	800 cont
32	Swedish tone ramp 1/long	800 Hz on/1.5 sec then 25 Hz	00000	800 cont

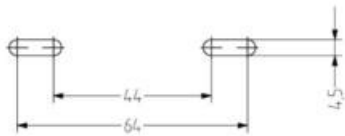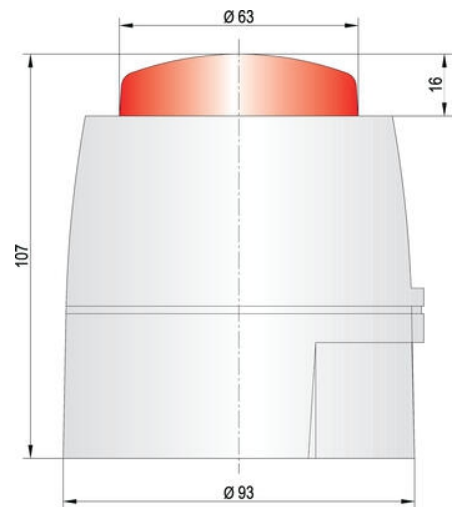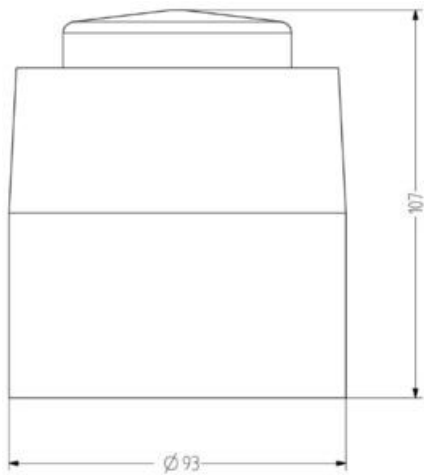

Nr.	Sound	Tone frequency	DR-switch	2nd stage alarm (Hz)
1	IF Buzzer	800-1000Hz at 0.5 sec	11111	800 count
2	Alarm tone on the 1st stage	800/900Hz at 2Hz	11110	800 count
3	Warning tone 1st stage	800/1000Hz at 2Hz	11101	800 count
4	Alarm tone on the 2nd stage	800/900Hz at 2Hz	11100	800 count
5	IF Buzzer at intermediate tone	800Hz at 1.5 sec on/off	11011	800 count
6	IF Buzzer at 1st stage	800Hz at 1.5 sec on/off	11010	800 count
7	IF Buzzer at intermediate tone - low	800Hz at 1.5 sec on/off	11001	800 count
8	IF Buzzer tone 2nd stage	800Hz on/off	11000	800 count
9	Swarm tone 1 (1Hz)	800/900Hz at 1Hz	10111	800 count
10	Australian slow whoop	Intermittent 970Hz 0.625ms on/0.625ms off	10110	3.75 sec on 10.75 sec off 800/900
11	Dutch sweep tone	970Hz count	10101	3.5 sec on 3.5 sec off 800/900
12	Swarm tone 2nd stage	800/900Hz at 2Hz	10100	800 count
13	Swarm tone 1st stage	800/900Hz at 2Hz	10011	800 count
14	Alarm tone 1st stage	800/900Hz at 2Hz	10010	800 count
15	Inter-IF alarm	800/900Hz at 2Hz	10001	800 count
16	US Temporal Pattern 1F	900Hz for 0.5 sec on 0.5 sec off x3 then 1.5 sec then repeat	10000	800 count
17	Intermittent tone 1st stage	Intermittent tone 800Hz at 0.5 sec on/off	01111	800 count
18	800/900 Hz 800/900 Hz 1.5 sec	Intermittent 970Hz 0.625ms on/0.625ms off	01110	Swarm tone
19	Intermittent tone 2nd stage	Intermittent 970Hz 0.625ms on/off	01101	800 count
20	800/900 Hz	Intermittent 970Hz 0.625ms on/off	01100	Swarm tone
21	Swarm tone	Intermittent 970Hz 0.625ms on/off	01011	Swarm tone
22	IF Buzzer	800/900Hz on/off at 1.5Hz	01010	800 count
23	IF Buzzer tone	800Hz	01001	800 count
24	Swarm tone 2nd stage	800/900Hz at 2Hz	01000	800 count
25	Swarm 1st stage	Intermittent 970Hz 0.625ms on/off	00111	800 count
26	Swarm tone 1st stage	Intermittent 970Hz 0.625ms on/off	00110	Swarm tone
27	Swarm tone at 1st stage	Intermittent 970Hz 0.625ms on/off	00101	800 count
28	Swarm tone at 2nd stage	Intermittent 970Hz 0.625ms on/off	00100	Swarm tone
29	US Temporal Pattern 1F	900Hz for 0.5 sec on 0.5 sec off x3 then 1.5 sec then repeat	00011	800 count
30	Swarm 2nd stage 1st stage	Intermittent 970Hz 0.625ms on/off	00010	800 count
31	IF Buzzer 1st stage	Intermittent 970Hz 0.625ms on/off	00001	800 count
32	Swarm 2nd stage 2nd stage	Intermittent 970Hz 0.625ms on/off	00000	800 count

