




## 2-4 PÓLOVÉ ROZVODOVÉ BLOKY

RPB1005

2pólová svorkovnice - RPB 125-14

- 40 A až 160 A.
- Samozhášivá izolační konstrukce UL 94-V0
- Izolace mezi fázemi
- Mosazné vodiče

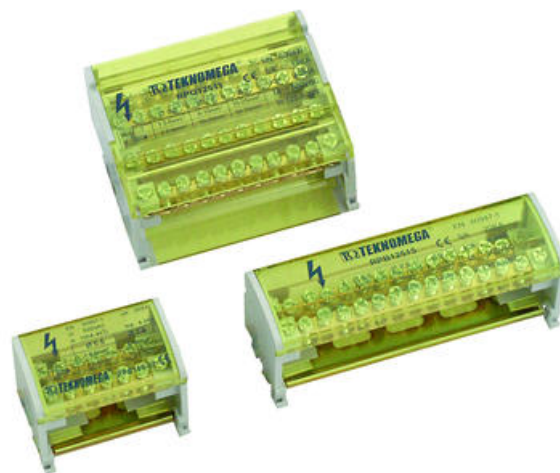

### POPIS PRODUKTU

### SPECIFIKACE

Connections	15
Fix. Hole space	112 mm
Height (H)	46 mm
Input A: diameter	9 mm
Input A: torque, max.	3 Nm
Input A: torque, min.	2 Nm
Input A: wire cross-section stranded, max.	35 mm <sup>2</sup>
Input A: wire cross-section stranded, min.	10 mm <sup>2</sup>
Input A: wire cross-section with wire-end ferrules, max.	25 mm <sup>2</sup>
Input A: wire cross-section with wire-end ferrules, min.	10 mm <sup>2</sup>
Length (L)	132 mm
Nominal insulation voltage	500 V
Nominální proud	125 A
Number of inputs A	1
Number of outputs A	1
Number of outputs B	11
Number of outputs C	2

<b>Output A: diameter</b>	9 mm
<b>Output A: torque, max.</b>	3 Nm
<b>Output A: torque, min.</b>	2 Nm
<b>Output A: wire cross-section stranded with wire-end ferrules, max.</b>	25 mm <sup>2</sup>
<b>Output A: wire cross-section stranded with wire-end ferrules, min.</b>	10 mm <sup>2</sup>
<b>Output A: wire cross-section stranded, max.</b>	35 mm <sup>2</sup>
<b>Output A: wire cross-section stranded, min.</b>	10 mm <sup>2</sup>
<b>Output B: diameter</b>	5,5 mm
<b>Output B: torque, max.</b>	3 Nm
<b>Output B: torque, min.</b>	2 Nm
<b>Output B: wire cross-section stranded with wire-end ferrules, max.</b>	6 mm <sup>2</sup>
<b>Output B: wire cross-section stranded with wire-end ferrules, min.</b>	1,5 mm <sup>2</sup>
<b>Output B: wire cross-section stranded, max.</b>	6 mm <sup>2</sup>
<b>Output B: wire cross-section stranded, min.</b>	2,5 mm <sup>2</sup>
<b>Output C: diameter</b>	7,5 mm
<b>Output C: torque, max.</b>	3 Nm
<b>Output C: torque, min.</b>	2 Nm
<b>Output C: wire cross-section stranded with wire-end ferrules, max.</b>	16 mm <sup>2</sup>
<b>Output C: wire cross-section stranded with wire-end ferrules, min.</b>	6 mm <sup>2</sup>
<b>Output C: wire cross-section stranded, max.</b>	25 mm <sup>2</sup>
<b>Output C: wire cross-section stranded, min.</b>	10 mm <sup>2</sup>
<b>Screw type</b>	Galvanized steel screws
<b>Short-circuit current resistance ICW over 1s</b>	4,2 kA
<b>Short-circuit current resistance IPK (peak value)</b>	20 kA
<b>Třída krytí</b>	IP20
<b>Width (P)</b>	51 mm

