




## KOMPAKTNÍ DISTRIBUČNÍ BLOKY

RPU3010

Unipolární distribuční blok - RPU 250-11

- Samostatné vstupy
- Snadné zapojení
- Včetně šroubů z pozinkované oceli
- Rychlé připojení na DIN lištu

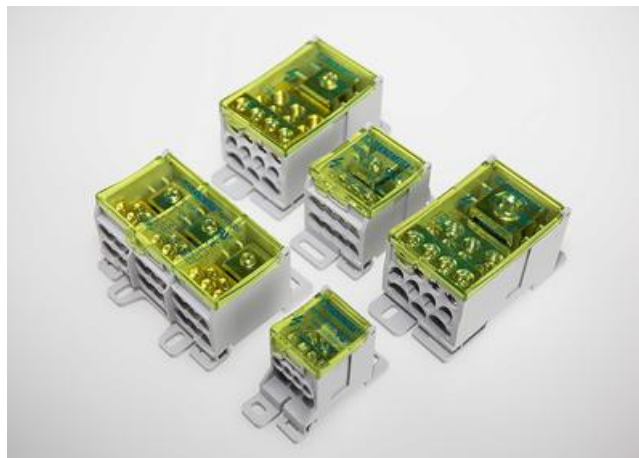

### POPIS PRODUKTU

### SPECIFIKACE

Connections	12
Height (A)	96 mm
Input A: wire cross-section stranded, max.	120 mm <sup>2</sup>
Input A: wire cross-section stranded, min.	35 mm <sup>2</sup>
Input A: wire cross-section with wire-end ferrules, max.	95 mm <sup>2</sup>
Input A: wire cross-section with wire-end ferrules, min.	35 mm <sup>2</sup>
Length (B)	47 mm
Nominal insulation voltage	600 V
Number of inputs A	1
Number of outputs A	2
Number of outputs B	5
Number of outputs C	4
Output A: wire cross-section stranded with wire-end ferrules, max.	25 mm <sup>2</sup>
Output A: wire cross-section stranded with wire-end ferrules, min.	6 mm <sup>2</sup>
Output A: wire cross-section stranded, max.	35 mm <sup>2</sup>
Output A: wire cross-section stranded, min.	6 mm <sup>2</sup>

<b>Output B: wire cross-section stranded with wire-end ferrules, max.</b>	16 mm <sup>2</sup>
<b>Output B: wire cross-section stranded with wire-end ferrules, min.</b>	2,5 mm <sup>2</sup>
<b>Output B: wire cross-section stranded, max.</b>	16 mm <sup>2</sup>
<b>Output B: wire cross-section stranded, min.</b>	2,5 mm <sup>2</sup>
<b>Output C: wire cross-section stranded with wire-end ferrules, max.</b>	10 mm <sup>2</sup>
<b>Output C: wire cross-section stranded with wire-end ferrules, min.</b>	2,5 mm <sup>2</sup>
<b>Output C: wire cross-section stranded, max.</b>	10 mm <sup>2</sup>
<b>Output C: wire cross-section stranded, min.</b>	2,5 mm <sup>2</sup>
<b>Screw type</b>	Galvanized steel screws
<b>Short-circuit current resistance ICW over 1s</b>	21 kA
<b>Short-circuit current resistance IPK (peak value)</b>	51 kA
<b>Třída krytí</b>	IP20
<b>Width (C)</b>	50 mm

